


# WST-333MG

The compact WST-333MG panel is a terrific All-round panel. Lighter and smaller than most panels available today it's perfect for carrying up steep pitched roofs and into locations where access is restricted. All panels come with 1.2M Cables and EVO MC4 connectors.

## WINAICO PERFORMANCE GUARANTEE

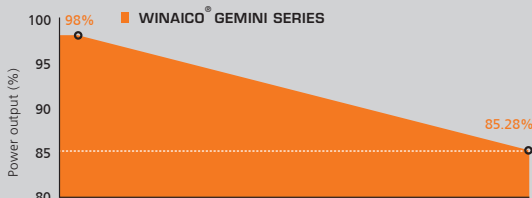

No more than 0.53% degradation per year from 2nd year to 25th year.



## MECHANICAL PROPERTIES

### Panel Dimensions

Weight	18.6 kg
Height	1589 mm
Width	1034 mm
Frame thickness	35 mm


### MAXIMUM VOLTAGE AT DIFFERENT TEMPERATURES

Temperature	Maximum Voltage
-20 °C	40.60 V
-15 °C	40.17 V
-10 °C	39.74 V
-5 °C	39.31 V
0 °C	38.88 V
10 °C	38.01 V
20 °C	37.15 V
25 °C	36.72 V
30 °C	36.29 V

## ELECTRICAL PROPERTIES

Electrical data	STC	NMOT
Nominal power $P_{MAX}$	333 W	243 W
Voltage max performance $V_{MP}$	30.80 V	28.28 V
Current max performance $I_{MP}$	10.82 A	8.59 A
Voltage open circuit $V_{OC}$	36.72 V	34.60 V
Current short circuit $I_{SC}$	11.39 A	9.00 A
Module efficiency	20.27 %	%
Temperature coefficient of $P_{Max}$	-0.35 %/°C	%/°C
Temperature coefficient of $V_{OC}$	-0.28 %/°C	%/°C


## CLAMP ZONE

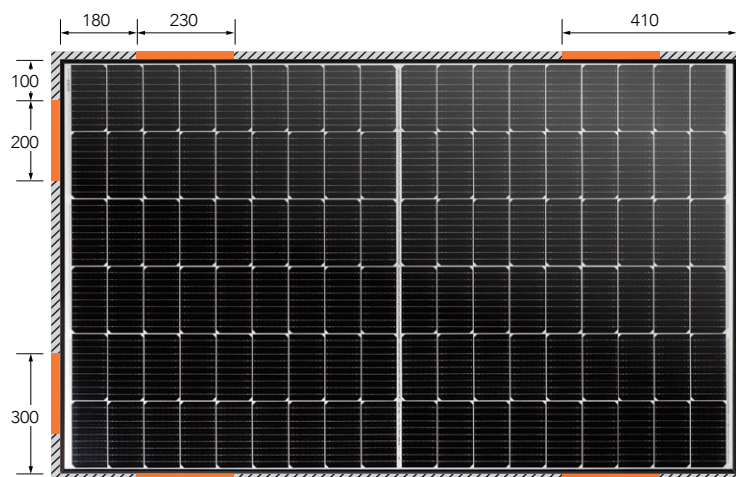

### Packing Configuration

Panels per pallet	30
Pallet weight	580 kg

## CHARACTERISTIC CURVES

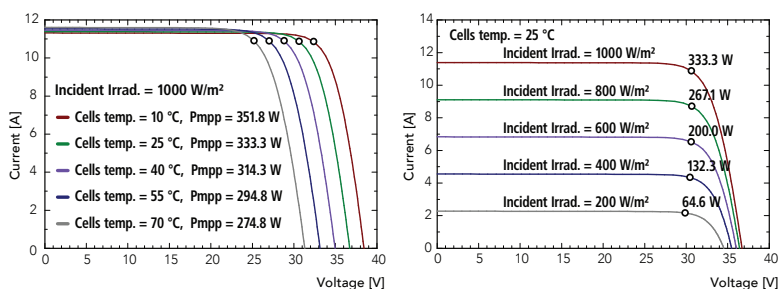

WINAICO Australia Pty Ltd

ABN: 36 156 406 067  
Level 3, 393 George St  
Sydney NSW 2000, Australia